65W | USB-C

XV65



COMPACT AND PORTABLE. XGRID USB-C CAR CHARGER.



BUILT FOR THE DRIVE.

Turn your 12V outlet into a high-speed 65W USB-C charging hub that outperforms factory ports. Power through navigation, streaming, and long drives - and arrive fully charged.

LOW-STANDBY DESIGN.

Engineered for ultra-low standby power when your vehicle is off, helping reduce unwanted battery drain while keeping your charger ready the moment you start your engine.

SMART POWER SHARING.

Up to 65W from a single port. Plug in two devices and power is dynamically balanced - 45W/20W, 30W/30W, or 20W/45W - so each device gets the fastest possible charge.

NOCO

30339 Diamond Parkway, #102
Glenwillow, OH 44139 | USA
1.800.456.6626

no.co

CHARGE EVERYTHING.

MEET THE XV65.


Works with virtually any USB-C device - phones, tablets, laptops, earbuds, handhelds, and more. One charger for every device you bring on the road.





INTELLIGENT SAFEGUARDS.

Real-time power monitoring protects against overcharging, overcurrent, and surges - and stays cool even during extended use, hot weather, and enclosed consoles.

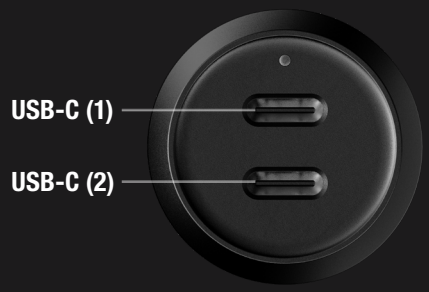


COMPACT POWER.

Advanced GaN technology packs 65W into an ultra-compact design, while blending seamlessly into your vehicle's interior. A precision fit stays secure over bumps, rough roads, and daily driving.

DYNAMIC POWER SHARING

USB-C (1)	USB-C (2)
65W	0W
45W	20W
30W	30W
20W	45W
0W	65W


WHAT'S IN THE BOX

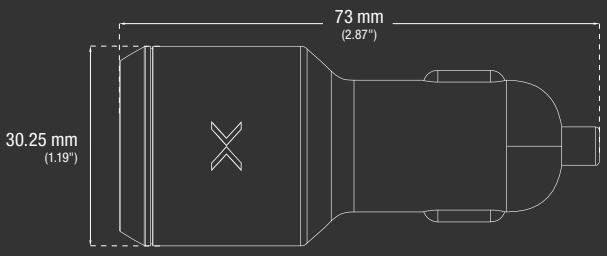

*Manuals not to scale with XV65



Quick Start Guide



Safety and Warranty Information

TECHNICAL SPECIFICATIONS

INPUT:	12V-24V ⎓ 7A Max
SINGLE OUTPUT:	USB-C1/C2 (PDO) 5V ⎓ 3A, 9V ⎓ 3A, 15V ⎓ 3A, 20V ⎓ 3.25A. (PPS) 5-11V ⎓ 4.5A, 5-21V ⎓ 3.25A (65W Max)
DUAL OUTPUT:	USB-C1/C2+USB-C2/C1 30W+30W or 45W+20W
TOTAL OUTPUT:	65W Max
OPERATING TEMPERATURE:	0°C to 40°C (32°F to 104°F)
STORAGE TEMPERATURE:	-40°C to 85°C (-40°F to 185°F)
WEIGHT:	0.11 lbs (0.05 kg)
VOLUMETRICS:	**Retail Packaging:** Dimensions: 2.60" x 2.05" x 3.82" Weight: 0.31 lbs **UPC:** 0-46221-25019-0 **Inner Carton:** Dimensions: 2.81" x 2.22" x 4.14" Weight: 0.35 lbs **Master Carton:** Dimensions: 7.28" x 6.18" x 4.92" Weight: 2.45 lbs Quantity: 6 **UCC:** 10046221250197

NOCO

30339 Diamond Parkway, #102
Glenwillow, OH 44139 | USA
1.800.456.6626
no.co

Intertek 5031555

CONFORMS TO UL STD. UL2089
CERTIFIED TO CSA STD. C22.2 No.107.1